

# CL 010 - 400 / 600 / 800

## HORIZONTAL WRAPPING MACHINE




Wrapping ring speed 2.9 / 2.2 / 1.7  
(per second, maximum)



Roll core / film accommodation  
mandrel) available in Ø 38 mm (1.5")



Product cross section (mm) 400 /  
600 / 800 (maximum)

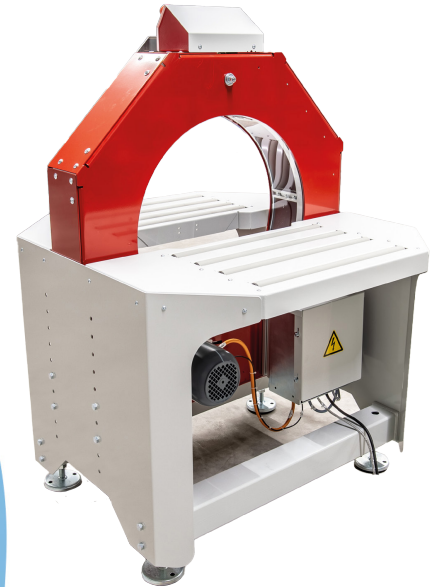

The CL 010 was designed according to our sophisticated, well-established solutions for your applications, which have proven their worth in the market, and is fully CE compliant. It is a manually operated Circle Line wrapping machine for universal application for long goods, stack packaging, tray packaging, cardboard boxes and sheet formats.

## FEATURES AND BENEFITS

### Second film roll intake

The wrapping ring is equipped with a second film intake. The film rolls are positioned so that they are opposite each other. This doubles the processing speed. In addition, the arrangement of film rolls on opposite sides ensures mutual compensation of the film tension on the product. This facilitates product handling during the wrapping process. Another advantage is that the machine can be equipped with twice the amount of film.

## Tongue in wrapping area

The tongue in the wrapping area is an aid for supporting flexible and/or short products during transfer from the infeed to the outfeed conveyor and holding them in place even more securely during the wrapping process. stack packaging, tray packaging, cardboard boxes and sheet formats.

## Manual lateral guide

This unit consists of a pair of lateral guide rollers, which can width-adjusted.

Product cross section (mm)	400 / 600 / 800 (maximum)
Wrapping ring speed	2.9 / 2.2 / 1.7 (per second, maximum)
Film width	80 mm (maximum)
Film roll exterior	120 mm (maximum)
Roll core / film accommodation mandrel	available in Ø 38 mm (1.5")
Electrical Connection	Mains voltage 230V+N+PE Power plug 16A / Schuko Control voltage 24 VDC



Gordian House, Brunel Road, Houndmills Industrial Estate,  
Basingstoke, Hampshire RG21 6XX, UK.



[www.gordianstrapping.co.uk](http://www.gordianstrapping.co.uk)



01256 394444



[sales@gordianstrapping.com](mailto:sales@gordianstrapping.com)