

CL 020

Horizontal wrapping machine



Wrapping ring speed 4.1/ 3.1/ 2.5/2.0 per second



Roll core / film accommodation mandrel available in Ø of 30, 38 or 76 mm



Additional start key with magnetic foot for machine operation from two positions.

The CL 020 is a semi-automatic Circle Line wrapping machine designed for a wide range of applications. Ideal for wrapping long goods, stacked products, tray packs, cardboard boxes and sheet materials; it offers a versatile and reliable packaging solution. This proven machine has established an excellent reputation in the market and is fully CE compliant.



Features and Benefits

Manual mode

The wrapping ring is started by pressing the foot pedal switch. The wrapping ring stops at a defined position when the foot pedal switch is released. The film is gripped and cut by an automatic film holder and linear cutter. The product is transported manually.


Feed-supported mode

The wrapping ring is started by pressing the foot pedal switch. If the product is just downstream of the wrapping ring, the hold-down unit is lowered onto the product.

Tongue in wrapping area

The tongue in the wrapping area is an aid for supporting flexible and/or short products during transfer from the infeed to the outfeed conveyor and holding them in place during the wrapping process.

Product cross section (mm)	400 / 600 / 800 / 1000 (maximal)
Wrapping ring speed	4,1 / 3,1 / 2,5 / 2,0 (per second)
Film width	125 mm (maximum)
Film roll exterior	200 mm (maximum)
Roll core / film accommodation mandrel	available in Ø 30 mm, 38 mm (1,5"), 76 mm (3")
Electrical Connection	Mains voltage 3 x 400V+N+PE Power plug 16A / CEE Control voltage 24 VDC
Pneumatic connection	Supply pressure 6 to 12 bar Air treatment dried / oil-free Plug-in coupling, nominal diameter 7.2

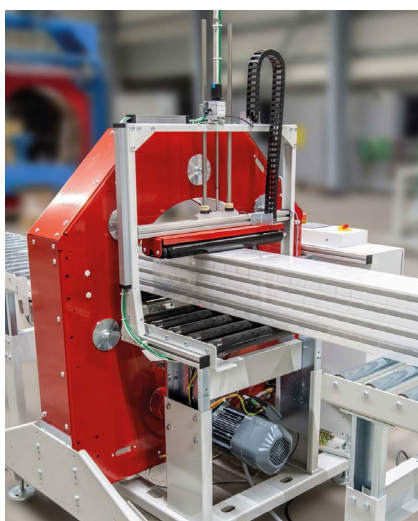

GORDIAN
STRAPPING

Gordian House, Brunel Road, Houndmills Industrial Estate,
Basingstoke, Hampshire RG21 6XX, UK.



www.gordianstrapping.co.uk



01256 394444



sales@gordianstrapping.com